





DU-019
Sepia



DU-002
Chamois

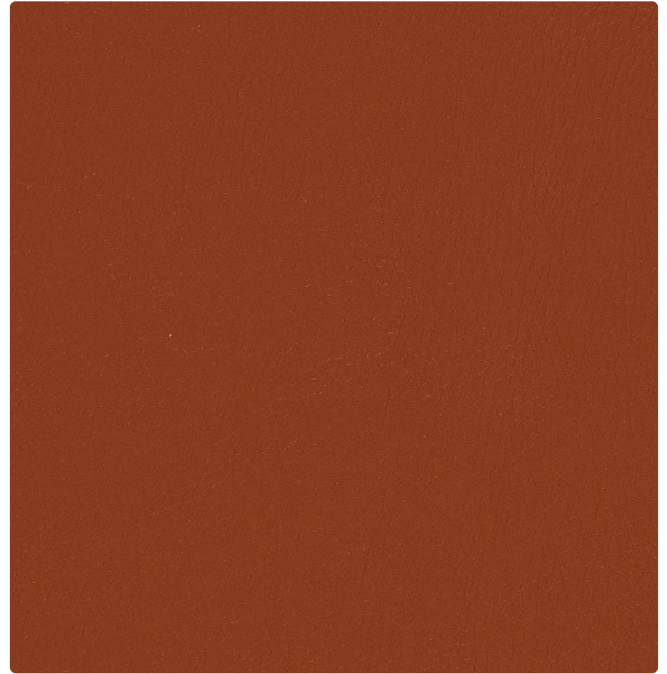

DU-029
Cordovan



DU-009
Tangelo



DU-023
Jade




DU-001
Paprika



DU-013
Basil



DU-014
Cyan



DU-007
Natural



DU-017
Alabaster



DU-011
Chili



DU-003
Ivy




DU-024
Aegean



DU-010
Bombay



DU-016
Char



DU-008
Merlot



DU-033
Calypso



DU-004
Sapphire



DU-000
Cocoa



DU-006
Black



Application
Upholstery Seating

Content
100% Vinyl

Width
54 inches

Abrasion (Wyzenbeek/Cotton Duck)
Exceeds 1,000,000 Double Rubs

Finish
PreFixx®

Reduced Environmental Impact
GREENGUARD Certified



TECHNICAL INFORMATION

Content: 100% Vinyl Width: 54" Weight: 30 oz./linear yd.	Backing: 100% Polyester Finish: PreFixx® Cleaning Code: WS, BC	Approx. Repeat: None Directional: No Railroaded: No
--	--	---

PERFORMANCE

Test Method	Results
Surface Abrasion: Heavy Duty	ASTM D 4157 (Cotton Duck) Exceeds 1,000,000^ Double Rubs
Breaking Strength:	CFFA-17 Warp 167 lbs/Fill 97 lbs
Colorfastness to Light:	CFFA-2 QUV - Outdoor Passes 650 Hours - Suitable for marine use
Cold Crack:	CFFA-6a -20° F

FLAMMABILITY

California Technical Bulletin 117-2013	Passes	Fed. Spec. CID A-A-2950/supercedes CCC-A-680A	Passes
NFPA 260/UFAC Class 1	Passes	FMVSS 302	Passes
BIFMA	Passes	NFPA 701	Passes
Boston Fire Dept. Code (BFD 1X-1)	Passes	NY & NJ Port Authority	Passes
FAA/FAR 25.853(a) and Appendix F Part I (a)(ii)	Passes		

Should comply with California Technical Bulletin 133 when combined with appropriate components.

REDUCED ENVIRONMENTAL IMPACT

This product is GREENGUARD Certified for low chemical and particle emissions to UL standard UL 2818 and may contribute to LEED certification. For complete information visit mayerfabrics.com and UL.com/gg.

SPECIFIC TREATMENTS

PreFixx® Protective Finish Anti-Microbial/Anti-Bacterial Protection Anti-Stain Finish/Easily Cleaned Anti-Static Slip Finish Urine Stain Resistant
Mildew Resistant Superior Disinfectant Resistance Oil Resistant Sulfide Stain Resistant/All Colors UV Stabilized Pigments

PreFixx® The first protective finish that starts where other finishes finish. With PreFixx® protection, it is possible to remove stains that could never be removed before. Now, with cost-proven stain resistance and cleanability, plus superior abrasion resistance, PreFixx® protected vinyls protect you from high maintenance and frequent reupholstery costs.

CLEANING INFORMATION

WS: Water/Solvent Cleaner – Spot clean, with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

Normal Care and Cleaning: Remove ordinary dirt and smudges with a mild soap and water solution and a clean, soft cloth or towel. Dry with a soft, lint-free cloth or towel. CAUTION: The use of upholstery "conditioners" or "protectants" is not recommended and should be avoided on vinyl upholstery treated with PreFixx® protective finish.

Disinfecting: Upholstery with PreFixx® protective finish can be disinfected with a diluted household bleach (sodium hypochlorite) solution (1:10 bleach to water ratio). Rinse with fresh water. Dry with a clean towel.

BC: Bleach Cleanable – 1 part bleach, 9 parts water = 10% bleach, 90% water solution. Do not clean/disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.

Special Cleaning Problems

Although performance fabrics treated with PreFixx® protective finish are resistant to most common stains, the dyes and pigments in some staining agents have the ability to create a permanent stain if not treated properly. To clean difficult stains from upholstery treated with PreFixx® protective finish, locate the staining agent in the lists below and follow the corresponding recommended cleaning method. For best results, treat all stains immediately.

Cleaning Tip: To determine the method and type of cleaners, the source of the stain should be identified.

Staining Agents: Baby oil, ketchup, chocolate, motor oil, olive oil, grape juice, urine, blood, hair oil tonic, tea, coffee, and betadine. Use Method 1.

Staining Agents: Eye Shadow, crayon and grease, tobacco tar (nicotine), permanent felt tip marker, yellow mustard, lipstick, ballpoint pen and spray paint.

Use Method 1. If stains remain, use Method 2.

The recommended cleaners used in Cleaning Methods 1 and 2 are progressively more aggressive. Often it is better to begin with the least aggressive cleaner and move to the next strongest only if the stain remains. NEVER EXCEED a staining agent's recommended cleaner or cleaning method, however.

Method 1: Use Formula 409® All-Purpose Spray cleaner or Fantastik® Spray Cleaner with a soft cloth or damp sponge. Rinse area with fresh water then dry with a clean, lint-free cloth.

Method 2: Use a solvent-type cleaner*, such as rubbing (isopropyl) alcohol 91%. Rinse cleaned area with fresh water then dry with a clean, lint-free cloth.

If the stain persists after six rubs, the stain has set and probably cannot be removed. Rinse cleaned area with fresh water, then dry with a clean, lint-free cloth.

*CAUTION: Some solvents are highly flammable. Exercise proper care in cleaning and notify personnel in area of danger. Wear rubber gloves during all cleaning activities. Use caution in cleaning around buttons, stitching and wooden or decorative trim, since these solvents could seriously damage such areas.

FORMULA 409 is a registered trademark of the Clorox Company FANTASTIK is a registered trademark of Dow Chemical Products Inc.

ADDITIONAL INFORMATION

Custom Capabilities: All patterns can be custom colored. Minimum yardage applies.

Memo Samples: Please keep this card intact. Individual memo samples can be ordered on our website or by contacting customer service.

Fabric Color Matching: Mayer Fabrics always attempts to ship a satisfactory commercial match. Because of industry standard dye lot variation, colors may not match exactly.

Digital Swatch Card Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.

^Abrasion: Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.

Specifications: Specifications are correct at the time of printing. Additional specifications are available on our website.

For information or assistance with products or services, call us at 800.428.4415 or refer to our website, www.mayerfabrics.com.



This fabric meets or exceeds these ACT performance guidelines.
Certification Marks owned by ACT



MAYERFABRICS

GSA Contract #GS-28F-0022P